


SOLID-BODY "HARD-HEAD" BITS

Relton's "Hard-Head" bits are designed to bore large holes through concrete without the need to break out the core every few inches.




Slide taper end of shank into the "Hard-Head" bit. A slight twisting motion will help keep the bit from falling off before beginning the cut. The pilot is integrated on the shank, so drilling can be accomplished without interruption! (Once used, shank and head become one-piece.)



Head-only
1 1/8" thru 1 1/2"

DIAMETER	PART NO.	LIST PRICE	WEIGHT (lbs)
1 1/8"	SB-18	\$137.00	0.7
1 1/4"	SB-20	142.00	0.8
1 1/2"	SB-24	147.00	1.3

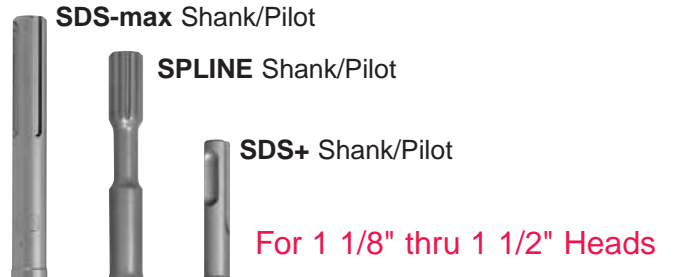


DRILLING DEPTH	FITS THESE HAMMERS	PART NO.	LIST PRICE	WEIGHT (lbs)
10"	SPLINE	S02-10S	\$ 48.00	1.8
	SDS-max	SMX-10S	58.00	1.7
	SDS+	S07-10S	48.00	0.9
18"	SPLINE	S02-18S	58.00	3.1
	SDS-max	SMX-18S	69.00	2.7
	SDS+	S07-18S	58.00	1.5
24"	SPLINE	S02-24S	69.00	3.9
	SDS-max	SMX-24S	79.00	3.6
	SDS+	S07-24S	69.00	1.9



Head-only
1 3/4" thru 3"

DIAMETER	PART NO.	LIST PRICE	WEIGHT (lbs)
1 3/4"	SB-28	\$ 163.00	1.4
2"	SB-32	174.00	1.9
2 1/2"	SB-40	200.00	3.4
3"	SB-48	226.00	5.4

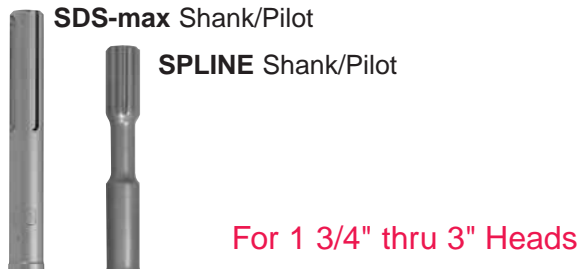

DRILLING DEPTH	FITS THESE HAMMERS	PART NO.	LIST PRICE	WEIGHT (lbs)
10"	SPLINE	S02-10	\$ 53.00	2.4
	SDS-max	SMX-10	63.00	2.4
18"	SPLINE	S02-18	63.00	3.8
	SDS-max	SMX-18	74.00	3.8
24"	SPLINE	S02-24	74.00	4.8
	SDS-max	SMX-24	84.00	4.8

IMPORTANT INFORMATION

Once Relton's "Hard-Head" bits have been used, the tapered shank cannot be removed by conventional means. For shank removal, return to Relton Corporation.