

ROTARY-ONLY REBAR EATERS

At last, the answer to drilling through concrete-embedded rebar! No more broken or shattered hammer bits; now you can drill through the rebar and not have to relocate the hole to avoid the rebar!

DIA	OVERALL LENGTH	Straight-Shank		SDS+ Shank		WT. (lbs)	SUGGESTED RPM'S	PIECES
		PART NO.	LIST PRICE	PART NO.	LIST PRICE			
3/8"	8"	RB-6	\$ 47.00	SRB-6	\$ 49.00	0.3	850-1200	This is a one-piece system (shanks are non-removable).
1/2"	12"	RB-8	49.00	SRB-8	51.00	0.6	850-1200	
1/2"	18"	RB-8-18	74.00	SRB-8-18	76.00	1.0	850-1200	
9/16"	12"	RB-9	56.00	SRB-9	58.00	0.7	850-1200	
5/8"	12"	RB-10	59.00	SRB-10	61.00	0.8	750-1000	
5/8"	18"	RB-10-18	79.00	SRB-10-18	81.00	1.3	750-1000	
11/16"	12"	RB-11	67.00	SRB-11	69.00	0.9	750-1000	
3/4"	12"	RB-12	68.00	SRB-12	70.00	1.1	600-850	
3/4"	18"	RB-12-18	87.00	SRB-12-18	89.00	1.6	600-850	
3/4"	24"	RB-12-24	100.00	SRB-12-24	102.00	1.8	600-850	
13/16"	12"	RB-13	74.00	SRB-13	76.00	1.1	600-850	
7/8"	12"	RB-14	91.00	SRB-14	93.00	0.9	600-850	
1"	12"	RB-16	95.00	SRB-16	97.00	1.1	500-750	This is a two-piece system, and comes with a shank to make a overall length of 12"; however, longer or shorter shanks are available...see shanks below
1 1/8"	12"	RB-18	112.00	SRB-18	114.00	1.2	500-750	
1 1/4"	12"	RB-20	118.00	SRB-20	120.00	1.3	450-600	
1 3/8"	12"	RB-22	120.00	SRB-22	122.00	1.4	450-600	
1 1/2"	12"	RB-24	132.00	SRB-24	134.00	1.6	350-500	
1 3/4"	12"	RB-28	167.00	SRB-28	169.00	1.8	350-500	
2"	12"	RB-32	184.00	SRB-32	186.00	2.5	350-500	
2 1/2"	12"	RB-40	200.00	SRB-40	202.00	3.1	350-500	



REPLACEMENT CUTTER HEAD 7/8" & LARGER



REPLACEMENT SHANKS 7/8" & LARGER



STRAIGHT SHANK

SDS+ SHANK

DIA	PART NO.	LIST PRICE	WT. (lbs)	SUGGESTED RPM'S	THREAD SIZE	PART NO.	LIST PRICE	SHANK	TO MAKE OAL BIT LENGTH	WT. (lbs)	THREAD SIZE
7/8"	RB-14HO	\$ 78.00	0.4	600-850	1/2-13 FEMALE	TDS-2-9	\$11.00	1/2"	9"	0.4	1/2-13 MALE
1"	RB-16HO	82.00	0.6	500-750		TDS-2-12*	13.00	1/2"	12"	0.5	
1 1/8"	RB-18HO	99.00	0.7	500-750		TDS-2-18	19.00	1/2"	18"	0.9	
1 1/4"	RB-20HO	105.00	0.8	450-600		TDS-2-24	26.00	1/2"	24"	1.2	
1 3/8"	RB-22HO	107.00	0.9	450-600		NEW STDS-2-9	13.00	SDS	9"	0.4	
1 1/2"	RB-24HO	119.00	1.1	350-500		NEW STDS-2-12*	15.00	SDS	12"	0.5	
1 3/4"	RB-28HO	154.00	1.3	350-500	NEW STDS-2-18	21.00	SDS	18"	0.9		
						NEW STDS-2-24	28.00	SDS	24"	1.2	
2"	RB-32HO	171.00	1.8	350-500	3/4-10 FEMALE	TDS-3-9	11.00	1/2"	9"	0.4	3/4-10 MALE
						TDS-3-12*	13.00	1/2"	12"	0.5	
						TDS-3-18	19.00	1/2"	18"	0.9	
						TDS-3-24	26.00	1/2"	24"	1.2	
						NEW STDS-3-9	13.00	SDS	9"	0.4	
						NEW STDS-3-12*	15.00	SDS	12"	0.5	
2 1/2"	RB-40HO	187.00	2.4	350-500	NEW STDS-3-18	21.00	SDS	18"	0.9		
					NEW STDS-3-24	28.00	SDS	24"	1.2		


Follow power tool manufacturers' recommendations for bit capacity.

*Supplied with complete bit.

SAFETY NOTE: The operator of this tool assumes sole responsibility for any adverse structural effects of cutting rebar. Consult structural engineers if you have any concerns

EASY AS....

- When rebar is encountered while drilling with a rotary hammer and a carbide hammer bit, immediately stop the hammer and remove the bit from the hole (failure to stop could severely damage a carbide hammer bit - regardless of manufacturer's claim).
- Mount a rotary rebar cutter in a standard 1/2" chuck/drill motor or SDS+ rotary hammer-motor (with the selector in the **rotary-only position**); insert the rotary rebar cutter into the hole and drill through the embedded rebar.
- Remove the rotary rebar cutter after the rebar has been drilled completely through and finish drilling the hole with the rotary hammer and hammer bit.

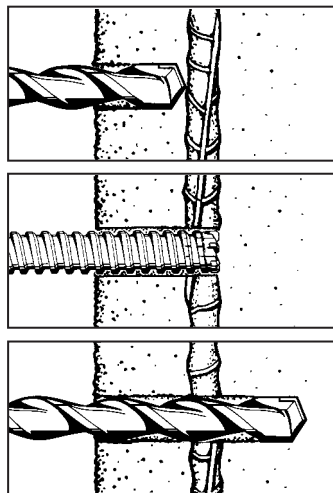

NOTICE:

The Relton carbide-tipped rotary rebar cutter is designed for use in a standard 1/2" chuck/drill motor or SDS+ hammer motor provided the selector mechanism is kept in the **rotary-only position**. The Relton carbide-tipped rotary rebar cutter is intended for **rotary** drilling only; percussion (hammering action) will damage the